

# Semi-Auto Food Slicer

Model : WFSECSA35B3

Economical semi-automatic slicer featuring a safety interlock system and blade safety ring. Ideal for Butchers, Delis and Supermarkets throughout Australia.

## FEATURES

- peizo switches that are resistant to water and to harsh environments
- high capacity carriage for large cuts of meats
- stow-away product holder for slicing flexibility
- patented poly-V belt drive with auto-belt tension to prevent any slipping
- single speed and stroke length for consistency
- adjustable salami fence, keeping round products stable
- large clearance for easy cleaning
- polished anodised aluminium alloy for hygiene and ease of cleaning
- 10 AMP single phase power



## SAFETY FEATURES

Blade safety ring: the blade is completely shrouded by a metal safety guard.

Safety interlock: the carriage interlock does not allow tilting of the carriage unless the index knob is set to zero. This prevents the blade from being exposed whilst cleaning, thereby reducing risk of injury.

Power fail safe: if mains power fails and is resumed, the slicer will not start until the slicer "on" button is re-selected by the operator. There is no risk of the slicer starting inadvertently.

No blade removal required: a large gap between the blade and motor housing allows easy access behind the blade for cleaning. There is no need for an operator to remove the blade.

CE Approved: this means the highest standards of design and manufacture have been adhered to for optimal level of safety for the user.

## SPECIFICATIONS

Model Number	Blade Diameter (mm)	Slice Thickness (mm)	Overall Dimensions (mm)
WFSECSA35B3	350	0 - 25	778 (W) x 610 (D) x 719 (H)

Specifications may change without notice




## FOOD EQUIPMENT

LABELS | LABELLING EQUIPMENT | PACKAGING EQUIPMENT  
ESL & DIGITAL SIGNAGE | WEIGHING SCALES | POS SYSTEMS  
FOOD EQUIPMENT | MAINTENANCE & REPAIRS | HIRE

1300 970 111  
enquiries@wedderburn.com.au  
www.wedderburn.com.au



ADDITIONAL SPECIFICATIONS

PRODUCT CAPACITY (mm)	
Maximum Product Diameter	235 Ø
Maximum Slice Thickness	25
Maximum Length	300
Maximum Height	160
DIMENSIONS (mm)	
Blade Diameter	350
Footprint	450 (W) x 590 (D)
Working Area Required	610 (W) x 780 (D) x 720 (H)
Motor	IP65 rated water resistant
Switches	IP69 rated water resistant
Weight	48.9 kg

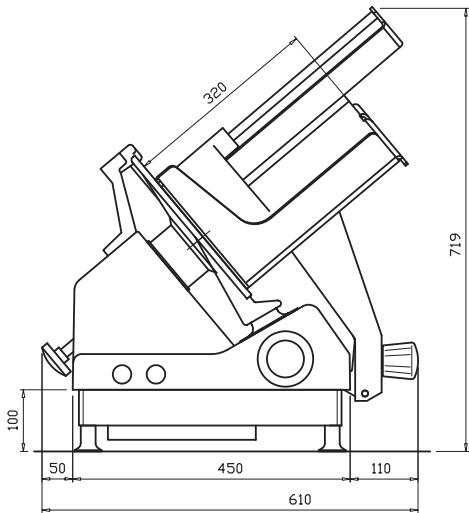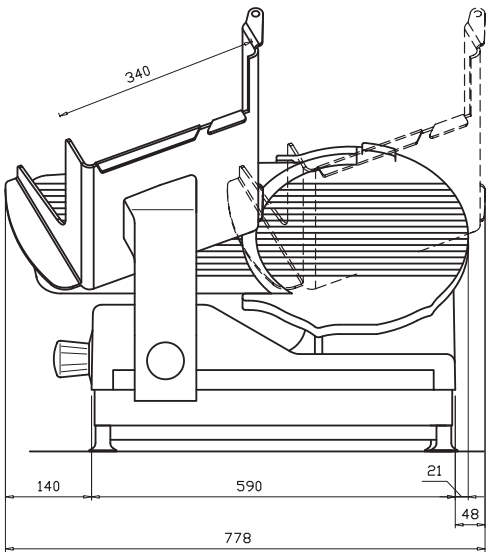

MAX. CUTTING SIZE: 200 x 200 mm

MAX. CUTTING SETTING: 25 mm

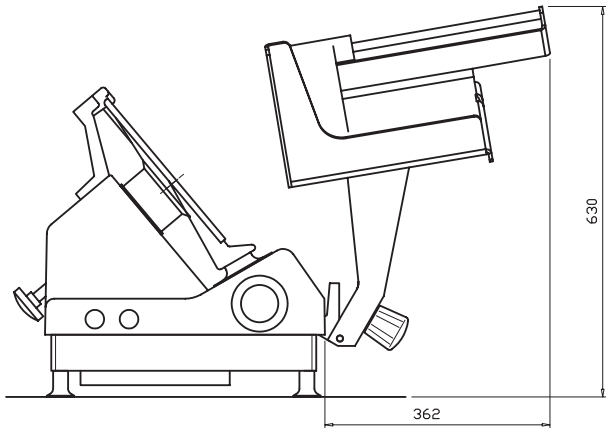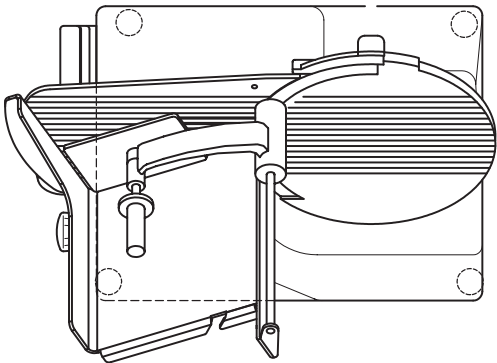

Specifications may change without notice